


## Cheetah 3.0 specs and updates for 2016

- built in the EU
- powder coated frame & components
- frame & fork: hi-ten steel, 28.6mm slim tube design
- headset: NECO H855 with tapered bearings
- tires: KENDA Kwest K193, 700C x 28C
- rims: 42mm deep V, double wall aluminium
- hand spoked wheels
- hubs: SHUNFENG, high flange, sealed bearings
- flip-flop: 17T chrome plated fixed gear & 16T freewheel
- bottom bracket: VP BC-73, sealed bearings, 110.5mm
- crankset: LASCO anodised Fi series, 46T 170mm
- chain: KMC Z410
- chain adjusters: integrated stainless steel bolts
- pedals: VP-536 flat BMX series
- foot straps: nylon with velcro and reflector
- brake calipers: PROMAX RC-469
- brake levers: PROMAX 249, two finger quick action
- cables: JAGWIRE with PVC romovable clamps
- handlebars: JBD aluminuim riser bars, 500mm x 50mm
- stem: PROMAX BA-96 BMX block
- seat: vinyl with PROMAX clamp and 25.4mm post





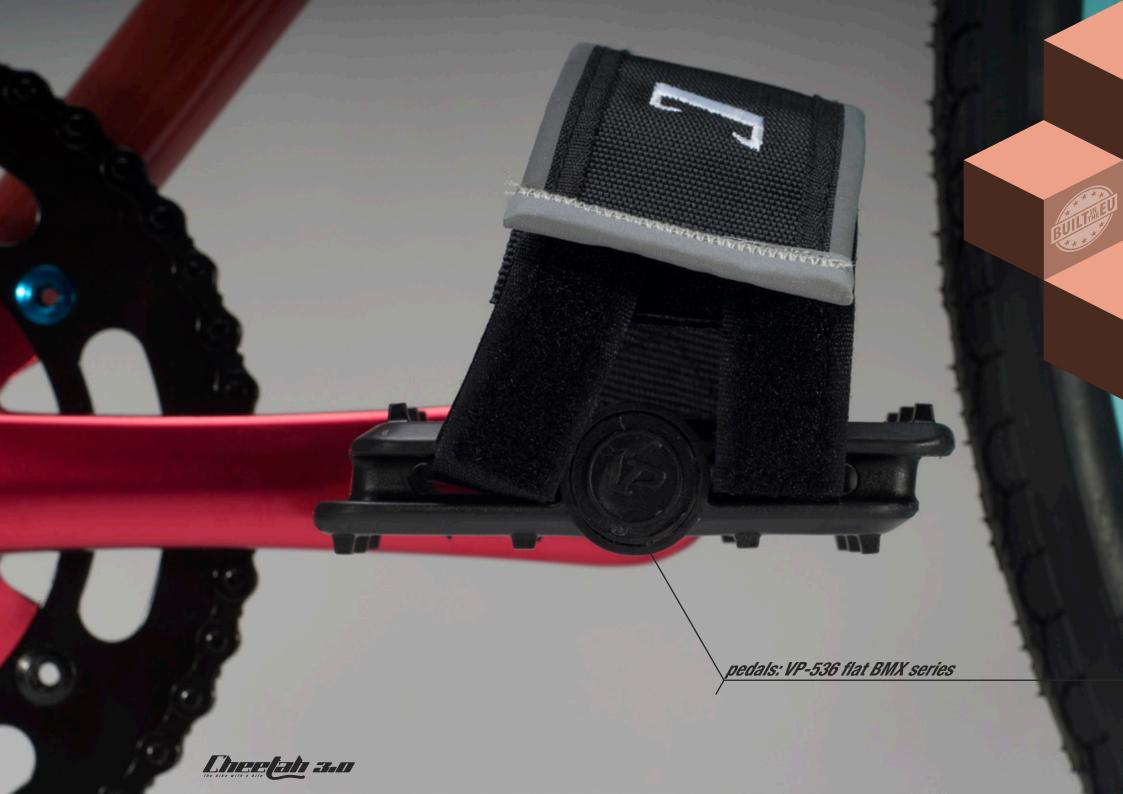














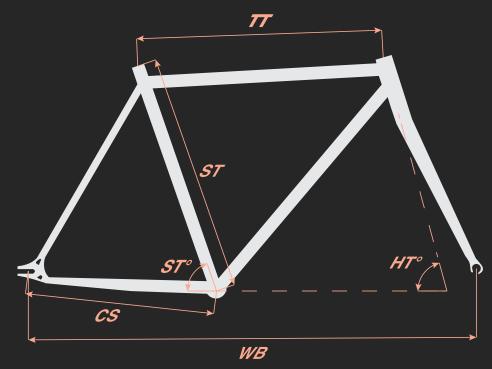

frame size 54cm

*ST - 540mm* 

ST°-72°

TT - 548mm

HT° - 73°

CS - 409mm

WB - 984mm

frame size 59cm

ST - 590mm

ST° - 72°

TT - 550mm

HT° - 73°

CS - 409mm

WB - 984mm

